



LIN-11B 长型直线滑块轴承 Long linear pillow blocks



- 封闭式枕块设计
- 装配LIN-11滑动膜
- 阳极氧化铝合金适配器
- 螺栓固定
- 免维护、低噪音
- 适用于污垢或灰尘环境
- 使用温度-50°C/+90°C
- Closed block design
- Assembled LIN-11 liners
- Anodized aluminum adapter
- Secured by bolts
- Maintenance-free and low noise
- Resistance to dirt and dust
- Operation temperature -50°C/+90°C

标准规格 Standard specifications

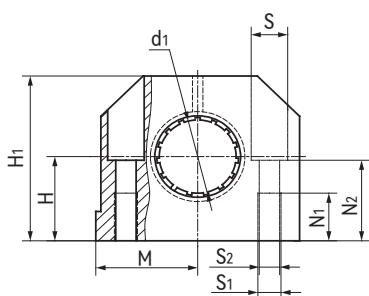

产品编码 Part No.:

LIN-11B-12

轴承内径 Inner diameter

长型设计滑块 Long design block

LIN-11标准滑动膜
Standard liners LIN-11

轴 Shaft: h6-h9

产品编码 Part No.	d ₁ [mm]	公差 Tolerance [mm]	H +0.01 -0.014 [mm]	H ₁ [mm]	A [mm]	M [mm]	E ₁ ±0.15 [mm]	E ₂ ±0.15 [mm]	S [mm]	S ₁ [mm]	S ₂ [mm]	N ₂ [mm]	N ₁ [mm]	L [mm]
LIN-11B-12	12	+0.030/+0.088	18	35	43	21.5	32	23	8	M5	4.3	16.5	11	39
LIN-11B-16	16	+0.030/+0.088	22	42	53	26.5	40	26	10	M6	5.3	21	13	43
LIN-11B-20	20	+0.030/+0.091	25	50	60	30	45	32	11	M8	6.6	24	18	54
LIN-11B-25	25	+0.030/+0.091	30	60	78	39	60	40	15	M10	8.4	29	22	67
LIN-11B-30	30	+0.040/+0.110	35	70	87	43.5	68	45	15	M10	8.4	34	22	79
LIN-11B-40	40	+0.040/+0.115	45	90	108	54	86	58	18	M12	10.5	44	26	91
LIN-11B-50	50	+0.050/+0.130	50	105	132	66	108	50	20	M16	13.5	49	34	113

产品编码 Part No.	轴径 Shaft [mm]	F max. [N] 最大动载荷 Dynamic Load P=5MPa	F max. [N] 最大静载荷 Static Load P=35MPa	重量 Weight [g]
LIN-11B-12	12	960	6720	121
LIN-11B-16	16	1440	10080	211
LIN-11B-20	20	2250	15750	323
LIN-11B-25	25	3625	25375	651
LIN-11B-30	30	5100	35700	1050
LIN-11B-40	40	8000	56000	1820
LIN-11B-50	50	12500	87500	3250